




Brand	Root
	HZ...

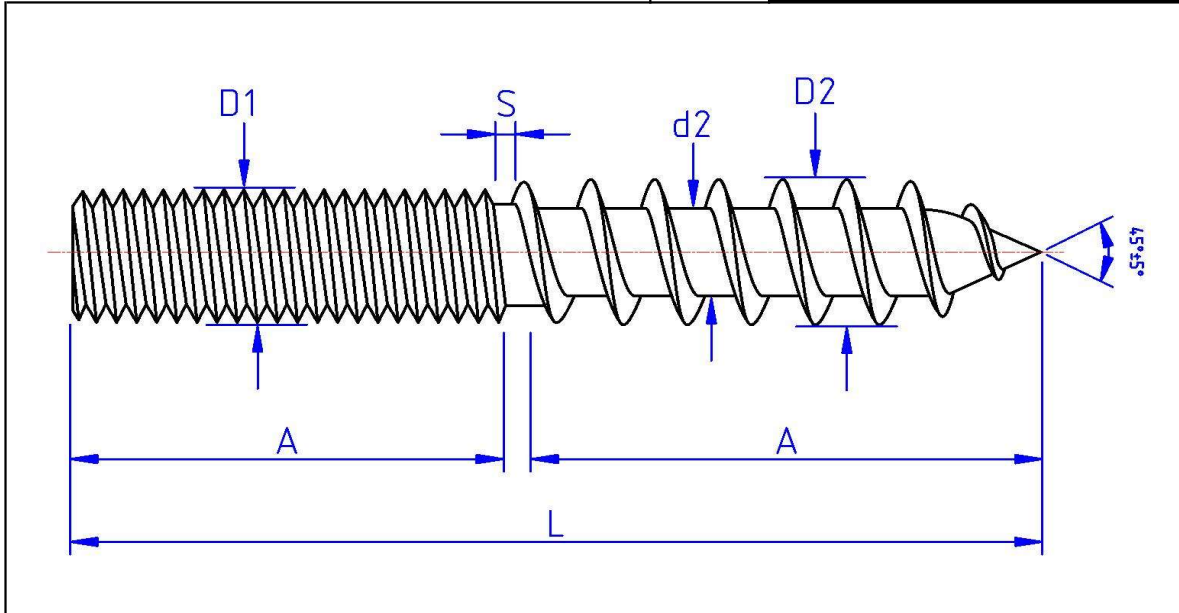

unit: INCH

L LENGTH TOLERANCE	$\leq 2-1/2$	± 0.04
	$> 2-1/2$	± 0.06

A THREAD LENGTH	$(1/2 \times L) - 0.0625$
------------------------------	---------------------------

SCREW SIZE		D1 THREAD SPEC	D1 THREAD DIAM.	D1 THREAD PER INCH	S SPACE LENGTH	d2 MINOR THREAD	D2 MAJOR THREAD	D2 THREAD PER INCH
3/16	Min	UNC 2A	0.182	24	Max 0.125	0.107	0.178	11
	Max	10 - 24	0.190					
1/4	Min	UNC 2A	0.241	20	Max 0.125	0.160	0.237	10
	Max	1/4 - 20	0.250					
5/16	Min	UNC 2A	0.303	18	Max 0.125	0.210	0.298	9
	Max	5/16 - 18	0.313					
3/8	Min	UNC 2A	0.364	16	Max 0.125	0.250	0.360	7
	Max	3/8 - 16	0.375					

Hanger Bolt, Zinc Plated
"A" should be equal in length, Steel SAE 1010

Root= Hanger Zinc

Bulk Label Description:

- English: HANGER BOLT, ZINC
- French: BOULON DE PATTES DE TABLE, ZINC
- Spanish: PERNO DE SUSPENSION, ZINC

Date: 2 octobre 2023

Done by: P.B.