


Brand	Root
	FKAS...

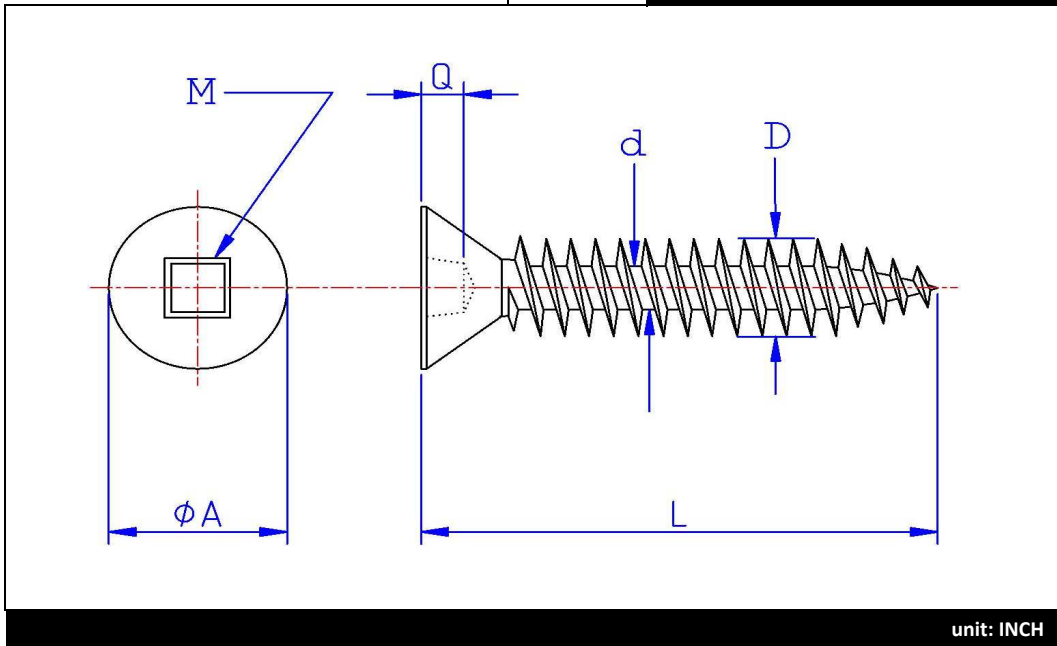

unit: INCH

L LENGTH TOLERANCE	≤ 1"	± 0.03
	> 1"	± 0.05

FULL THREAD

SCREW SIZE	M PUNCH		Q DRIVE DEPTH	A HEAD DIAM.	d MINOR DIAM.	D THREAD DIAM.	THREAD PER INCH
# 6	# 1	Min	0.050	0.238	0.096	0.136	18
		Max	0.065	0.262	0.102	0.141	
# 8	# 2	Min	0.060	0.285	0.116	0.162	15
		Max	0.075	0.312	0.123	0.168	
# 10	# 2	Min	0.060	0.333	0.126	0.188	12
		Max	0.075	0.362	0.133	0.194	
# 12	# 3	Min	0.080	0.380	0.155	0.215	11
		Max	0.095	0.412	0.162	0.221	
# 14	# 3	Min	0.080	0.427	0.178	0.248	10
		Max	0.095	0.462	0.185	0.254	

FLAT COUNTERSUNK HEAD, SQUARE RECESS, TAPPING SCREW TYPE-A, STAINLESS STEELS (18-8), Passivated

Root = Flat socKet type-A, Stainless

Bulk Label Description:

English: FLAT HEAD, SQUARE, TAPPING SCREW TYPE-A, STAINLESS STEEL

French: VIS À MÉTAL TYPE-A, TÊTE PLATE, CARRÉ, ACIER INOXYDABLE

Spanish: TORNILLO METÁLICO, PUNTA TIPO A, CABEZA PLANA, CUADRADO, ACERO INOXIDABLE

Date: 21 janvier 2019

Done by: P.B.