
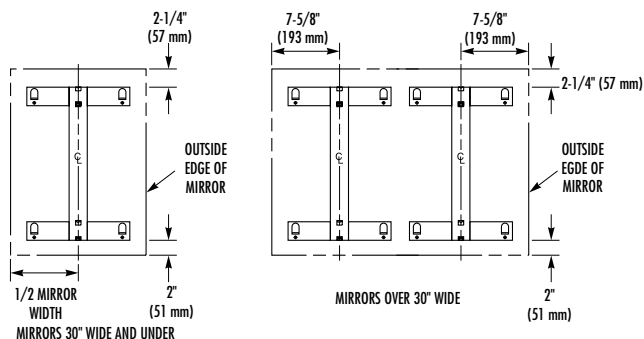


MIRROR

- Roll-Formed Channel Frame
- Theft Resistant Mounting



Bradex™ Models				
Width (Inches)	Height (Inches)	Overall Dimension (Inches)	Overall Dimension (Millimeters)	Standard Model Number
18"	24"	18 x 24	457 x 610	781-1824
18"	30"	18 x 30	457 x 762	781-1830
18"	36"	18 x 36	457 x 914	781-1836
24"	30"	24 x 30	610 x 762	781-2430
24"	36"	24 x 36	610 x 914	781-2436
24"	60"	24 x 60	610 x 1524	781-2460

Model 781 series channel framed mirrors can be fabricated to fit any architectural requirement. To specify sizes other than those indicated above, use the following formula: Model 781 + width in inches x height in inches. Example 781 - 3054.

MODEL 781

CONSTRUCTION:

- **FRAME** fabricated of heavy-gauge, one-piece, roll-formed stainless steel with bright annealed finish. Channel is 3/4" x 3/4" x 7/16" with 90° mitered corners. Double-strength continuous integral stiffener on all sides for added strength.
- **BACK** fabricated of 20 gauge galvanized steel.
- **MIRROR** of first quality 1/4" float glass triple silver plated with electro-copper plated layer and thermosetting infrared cured paint backing with Poly-Glaze protective finish. Meets federal specification DD-M-00411b against silver spoilage and guaranteed for 15 years. All edges protected by shock-absorbing, neoprene tubing.
- **MOUNTING BRACKETS** fabricated of 18 gauge cold rolled steel.

INSTALLATION:

Secure concealed mounting brackets to wall with screws (included) at holes provided. NOTE: Provide in-wall backing at mounting screw locations. Position mirror over mounting brackets to engage hanger tabs. Slide mirror down and lock into position.

OPTIONAL FEATURES:

Feature	Suffix
<input type="checkbox"/> 1/4" tempered glass mirror in lieu of polished float glass mirror	-2
<input type="checkbox"/> Laminate glass	-3
<input type="checkbox"/> Highly polished No. 8 architectural finish, 20 gauge stainless steel in lieu of polished float glass mirror	-4
<input type="checkbox"/> Bright annealed 20 gauge stainless steel in lieu of polished float glass mirror	-5
<input type="checkbox"/> Plexiglass	-6

NOTE: An inherent characteristic of a manufacturing process is distortion which may vary from mirror to mirror.

GUIDE SPECIFICATION:

Mirror shall be framed with one-piece, roll-formed stainless steel with 3/4" face and neatly mitered corners. Double-strength continuous integral stiffener on all sides. Back of unit shall be 20 gauge galvanized steel. Separate mounting brackets for concealed mounting. Mirror shall be of first quality 1/4" polished float glass, guaranteed for 15 years against silver spoilage and protected by shock absorbing, neoprene tubing with Poly-Glaze protective finish.

Framed Mirror shall be Bradley Model 781- 24 " W x 44 " H (specify width and height).