
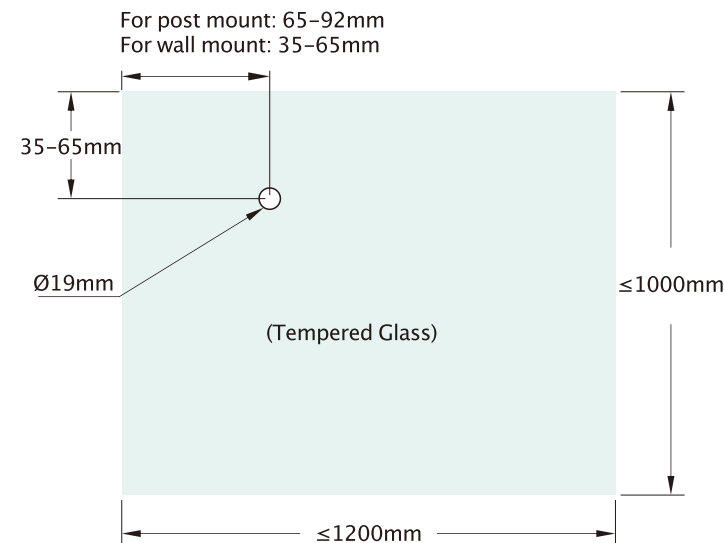
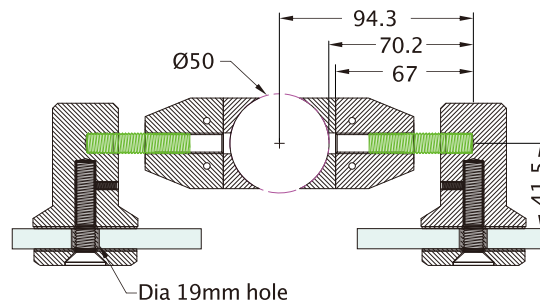


# Technical Detail | Fixed double arm glass connector

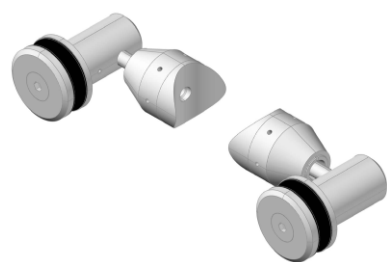


MODEL	Glass thickness	Glass type	Max. glass weight
Hr14080105012	12mm glass	Tempered	40kg


Finishes = Brushed stainless steel

## Installation Instructions



Option 1: Round post mount

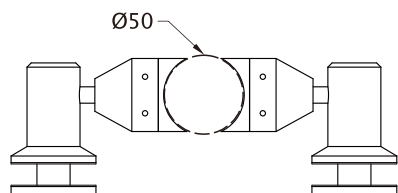

Option 2: Square or rectangular post mount

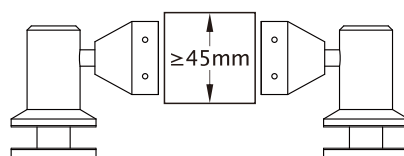

Option 3: Wall Mount

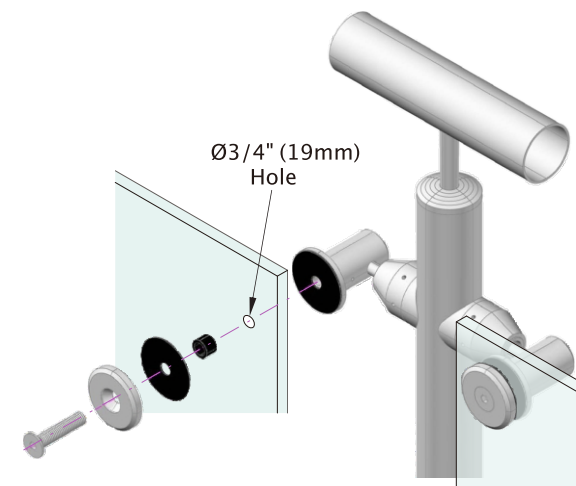


Step 1. Install the double arm connector onto the post or wall.

\*For round posts or flat posts with a width of 50mm or less, thread the M10×70mm screw through the post and install the connectors on either ends of the screw.

\*For wider posts or wall mounting, use one M10×50mm screw for each side.

Step 2. Align the 19mm diameter hole on the glass with the glass connector and install as shown.



### Tools required for installation:

Spirit Level  
Measuring tape  
Power drill  
8 -10 mm drill bit for installation stone  
Philips screwdriver  
Plastic wedges

*Please see safety instructions on power drill before starting assembly*